

EverWood™ Premier


TORLYS
smart floors



RICHMOND

-  Waterproof
-  Warm&Quiet
-  Gap Resistant
-  Antimicrobial
-  Scratch Resistant
-  Flood Warranty
-  Easily Repairable
-  Dent Resistant
-  Seamless Installation

EverWood™ Premier

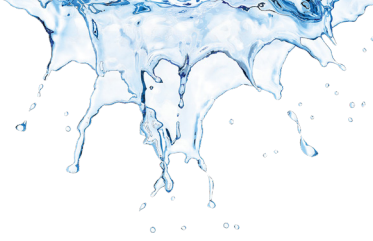

5/16" (T) x 4-7/8" (W) x 48-3/8" (L)
8.3mm (T) x 123mm (W) x 1230mm (L)

14.66 SF per box
84 boxes per pallet

Details

- 100% waterproof - backed by TORLYS exclusive Flood Warranty
- Precision-crafted, softly textured luxury vinyl with stunning wood grain designs
- TORLYS Maxx Commercial Finish resists high traffic wear and staining, and features built-in antimicrobial protection
- Easy to maintain – a perfect floor for high-use rooms like bedrooms, kitchens, family and living rooms
- Pet Friendly: shows no visible signs of surface staining per strict ASTM F925 standard when tested with pet urine
- Warm, comfortable and quiet underfoot
- 4-sided finished micro-bevels
- Install transition free up to 80' x 80'
- Industry leading glueless locking system by Uniclic®, the most advanced, gap-resistant joint system available today
- CorkPlus™ Blue attached cork underlay with Microban® antimicrobial product protection inhibits the growth of mold and mildew under your floors
- TORLYS Bulldog™ Easy Plank Replacer enables single planks to be replaced, quickly and easily. No mess, no dust, no downtime

The Original WPC Vinyl



Waterproof

EverWood™ is 100% waterproof - backed by TORLYS exclusive Flood Warranty.



Transition Free

EverWood™ is a remarkably stable floor that can be installed transition free in spaces up to 80' x 80' no more "speed bumps" in doorways or long hallways.*

**Visit torlys.com for full details.*



TORLYS Bulldog™ Easy Plank Replacer

TORLYS Bulldog™ enables single planks and tiles to be replaced, quickly and easily. No mess, no dust, no downtime.

GLENBROOK*

EW-23026

WENTWORTH*

EW-23027

RICHMOND*

EW-23029

HILLSTON*

EW-23028

BEACH HOUSE*

EW-23001

OYSTER BAY

EW-23005

SHELBOURNE

EW-23025

SPRING CREEK

EW-23008

SANDY RIDGE

EW-23007

ROCKWOOD

EW-23006

*High Shade Variation



certified by SCS Global Services

certified by SCS Global Services

A Cleaner Floor Starts Here.

Contribute to a cleaner home with built-in antimicrobial protection.



TORLYS Maxx Commercial Finish with built-in antimicrobial technology will keep your floors **99% cleaner** between cleanings, **24/7**.

TORLYS CorkPlus™ Blue with Microban® offers safe and effective protection against the growth of mold and mildew under your floors.

For more information visit torlys.com/CleanerFloors.



SHELBOURNE

Finishing Touches

TORLYS Smart-T Plus Molding
Easy and convenient, the TORLYS Smart-T Plus molding solution offers an adaptable and digitally matched profile. Suitable for floating applications.*

TORLYS SmartNosing Molding
A unique stair nosing solution to add the perfect finishing touch. This square edge nosing features the same Uniclic® joint as your floor for an easy and seamless installation.

*See installation instructions for details.

Sustainability

Every TORLYS Smart Floor has two lives. Years down the road when you want to change your floor, TORLYS will offer a 10% credit towards the purchase of a new floor when your existing Smart Floor is reused or donated to Habitat for Humanity.*

*Visit torlys.com for details.

Warranty

Lifetime Residential S.M.A.R.T. Warranty

15-Year Commercial Warranty

EverWood™ Premier is covered by an exclusive **Flood Warranty**.*

*Visit torlys.com for full warranty and installation information.

TORLYS Beautiful Promise

Love the style and colour of your floors or change them – no questions asked. That's our beautiful promise.*


Healthy Home - Indoor Air Quality

We follow some of the most stringent standards in the world. TORLYS flooring products meet California Section 01350 and/or FloorScore® certification.

**Visit torlys.com for details.*

ASTM and ANSI Product Performance Tests

Standard	Description	Test Result	Notes
ASTM E648-14a	Critical Radiant Flux	Average Critical Radiant Flux: 0.72 W/cm ²	NFPA 101 Classification: Class 1
ANSI A137.1-2012 (aka DCOF AcuTest)	Coefficient of Friction (Floor Slip Resistance): a) Dynamic Coefficient of Friction (wet)	Mean Result: 0.43	ANSI A137.1-2012 /
	Coefficient of Friction (Floor Slip Resistance): b) Static Coefficient of Friction (dry)	Mean Result: 0.80	DCOF AcuTest replaces ASTM C1028-07*
ASTM F970	Static Load Limit / Residual Indentation @ 250 PSI	0.003 inches	
	Static Load Limit / Residual Indentation @ 1000 PSI	0.055 inches	
ASTM C518	Thermal Resistance	SI Units 0.10 K·m ² /W	Imperial Units 0.59°F·ft ² ·h/BTU·in
ASTM F925-02	Resistance to Chemicals	0 = No Change	
ASTM F1515	Resistance to Light	ΔE ≤ 8	Test result after 300 hours exposure
CPSC-CH-C1001-09.3 (California Proposition 65)	Phthalates	Does not contain phthalate esters	
ASTM E492-09 / ASTM E989-06	Impact Insulation Class	Contact TORLYS for details	
ASTM E90-04 / ASTM E413-10	Sound Transmission Coefficient	Contact TORLYS for details	

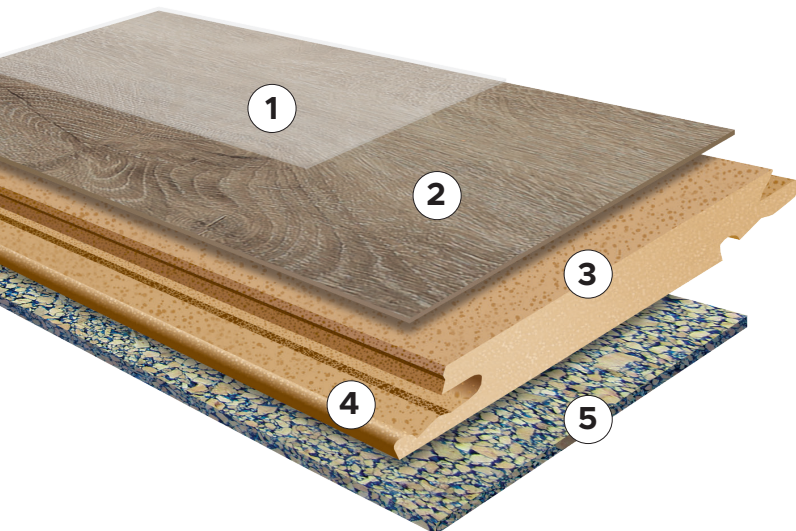

How It's Made

1) Top Layer

Ultra-thick 0.5mm (20 mil) wear layer for ultimate wear resistance

2) Decorative Layer

Beautiful, authentic look and fade resistant

3) TORLYS Enhanced Smart Core

More than twice as thick as the industry standard

4) TORLYS Uniclic® Joint

Gap-free installations and easy repairs with TORLYS Bulldog™ Easy Plank Replacer

5) TORLYS CorkPlus™ Blue Underlay

Quiet, comfortable, built-in underlay with Microban® antimicrobial product protection