

Product Specifications

Style Number	VV458	
Construction	Waterproof Foamed Core	
Edge Profile	Accent Bevel	
Nominal Dimensions	7" wide, 72" long	
	US Units	Metric Units
Actual Product Width	7.13"	18 cm
Actual Product Length	72.05"	183 cm
Wear Layer Thickness	30 mil (0.03")	0.76 mm
Overall Product Thickness	0.472"	12 mm
Core Thickness	0.354"	9 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.118"	3 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	


Packaging

Area per Box	21.39 sq ft	1.98 sq m
Pieces per Box	6 pcs	
Weight per Box	53.77 lbs	24.38 kg
Boxes per Pallet	35 boxes	



2701 Reserve Oak

Colors

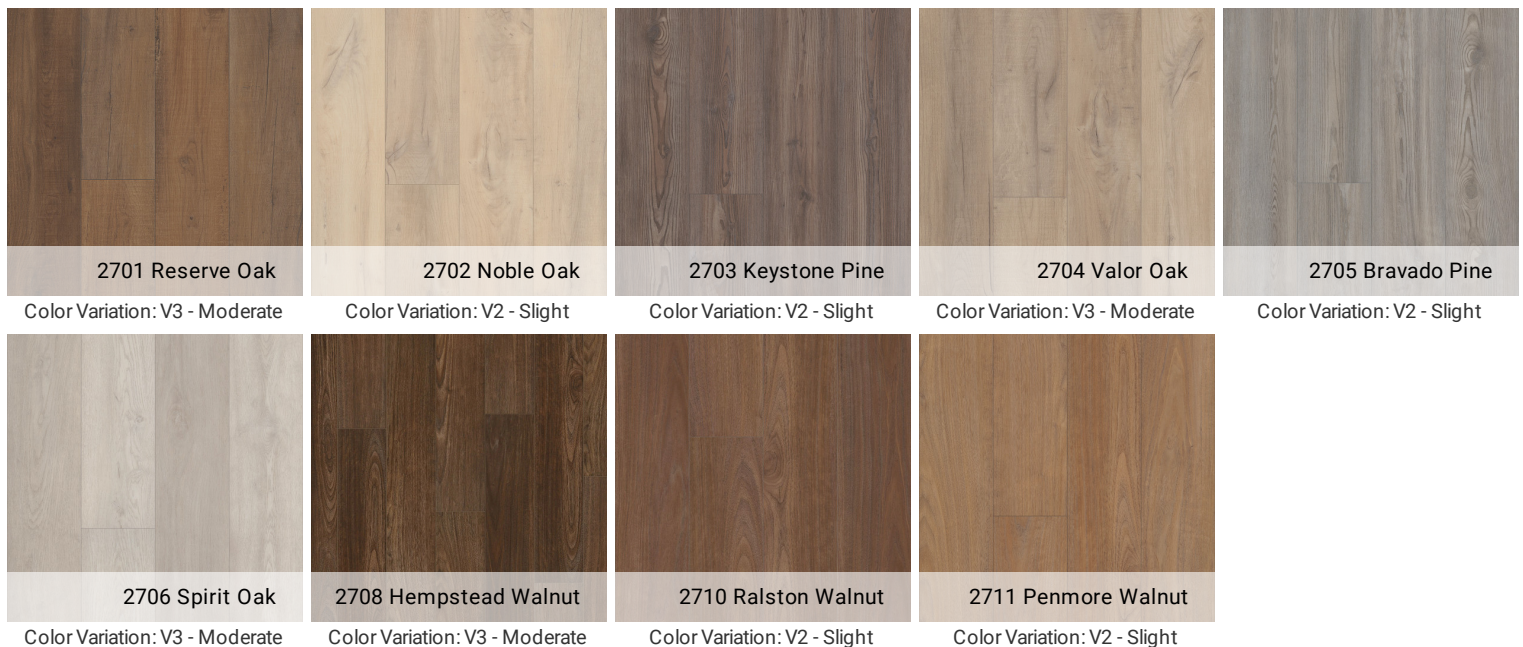

COREtec Originals Premium VV458

Performance

Residual Indentation (ASTM F1914)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

- USF Lifetime
- [Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof](#)
- USF 10 Year Medium Commercial


Certifications

GreenGuard (Certification, Gold, Private Label) Certified


Coordinating Trim




Baby Threshold*
06V26 | 94"




T-Molding*
06V31 | 94"




Quarter Round
06V27 | 94"



Overlap Stairnose*
06V29 | 94"



Flush Stairnose
06V30 | 94"

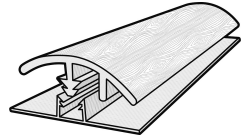

Overlap Reducer
06V28 | 94"

*Packaged with molding track

Stair Tread



Stair Tread
03Z70 | 48"

