










EverWood™ Designer Plus


TORLYS
smart floors



MAFFRA

-  Waterproof
-  Warm&Quiet
-  Gap Resistant
-  Antimicrobial
-  Scratch Resistant
-  Flood Warranty
-  Easily Repairable
-  Dent Resistant
-  Seamless Installation

EverWood™ Designer Plus

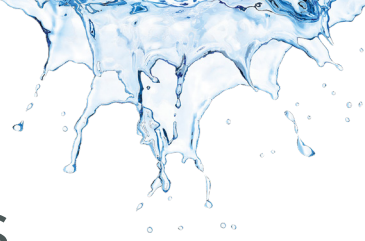

5/16" x 9" x 72" (nominal)
8.3 mm x 228 mm x 1830 mm

26.94 SF per box
56 boxes per pallet

Details

- 100% waterproof - backed by TORLYS exclusive Flood Warranty
- Extra wide and long planks in on-trend colours and realistic textures add a luxurious feel to any room
- TORLYS Maxx Commercial Finish resists high traffic wear and staining, and features built-in antimicrobial protection
- Easy to maintain – a perfect floor for high-use rooms like bedrooms, kitchens, family and living rooms
- Pet Friendly: shows no visible signs of surface staining per strict ASTM F925 standard when tested with pet urine
- Warm, comfortable and quiet underfoot
- 4-sided finished micro-bevels
- Install transition free up to 80' x 80'
- Industry leading glueless locking system by Uniclic®, the most advanced, gap-resistant joint system available today
- CorkPlus™ Blue attached cork underlay with Microban® antimicrobial product protection inhibits the growth of mold and mildew under your floors
- TORLYS Bulldog™ Easy Plank Replacer enables single planks to be replaced, quickly and easily. No mess, no dust, no downtime

The Original WPC Vinyl



Waterproof

EverWood™ is 100% waterproof - backed by TORLYS exclusive Flood Warranty.



Transition Free

EverWood™ is a remarkably stable floor that can be installed transition free in spaces up to 80' x 80' no more "speed bumps" in doorways or long hallways.

Visit torlys.com for full details.



TORLYS Bulldog™ Easy Plank Replacer

TORLYS Bulldog™ enables single planks and tiles to be replaced, quickly and easily. No mess, no dust, no downtime.

ATHERTON*

EW-DP550

NAROOMA*

EW-DP551

MAFFRA*

EW-DP552

DORRIGO*

EW-DP553

ESPERANCE*

EW-DP554

BAROSSA*

EW-DP555

*High Shade Variation



ASSURED BY SGS Global Services

LISTED BY SGS Global Services

A Cleaner Floor Starts Here.

Contribute to a cleaner home with built-in antimicrobial protection.



TORLYS Maxx Commercial Finish with built-in antimicrobial technology will keep your floors **99% cleaner** between cleanings, **24/7**.

TORLYS CorkPlus™ Blue with Microban® offers safe and effective protection against the growth of mold and mildew under your floors.

For more information visit torlys.com/CleanerFloors.



ATHERTON



Finishing Touches

TORLYS Smart-T Plus Molding

Easy and convenient, the TORLYS Smart-T Plus molding solution offers an adaptable and digitally matched profile. Suitable for floating applications.*

TORLYS SmartNosing Molding

A unique stair nosing solution to add the perfect finishing touch. This square edge nosing features the same Uniclic® joint as your floor for an easy and seamless installation.

*See installation instructions for details.

Sustainability

Every TORLYS Smart Floor has two lives. Years down the road when you want to change your floor, TORLYS will offer a 10% credit towards the purchase of a new floor when your existing Smart Floor is reused or donated to Habitat for Humanity.*

*Visit torlys.com for details.

Warranty

Lifetime Residential S.M.A.R.T. Warranty

15-Year Commercial Warranty

EverWood™ Designer Plus is covered by an exclusive **Flood Warranty**.*

*Visit torlys.com for full warranty and installation information.

TORLYS Beautiful Promise

Love the style and colour of your floors or change them – satisfaction guaranteed. That’s our beautiful promise.*


Healthy Home - Indoor Air Quality

We follow some of the most stringent standards in the world. TORLYS flooring products meet California Section 01350 and/or FloorScore® certification.

**Visit torlys.com for details.*

ASTM and ANSI Product Performance Tests

Standard	Description	Test Result	Notes
ASTM E648-14a	Critical Radiant Flux	Average Critical Radiant Flux: 0.72 W/cm ²	NFPA 101 Classification: Class 1
ANSI A137.1-2012 (aka DCOF AcuTest)	Coefficient of Friction (Floor Slip Resistance): a) Dynamic Coefficient of Friction (wet)	Mean Result: 0.43	ANSI A137.1-2012 / DCOF AcuTest replaces ASTM C1028-07*
	Coefficient of Friction (Floor Slip Resistance): b) Static Coefficient of Friction (dry)	Mean Result: 0.80	
ASTM F970	Static Load Limit / Residual Indentation @ 250 PSI Static Load Limit / Residual Indentation @ 1000 PSI	0.003 inches	
		0.055 inches	
ASTM C518	Thermal Resistance	SI Units 0.10 K·m ² /W	Imperial Units 0.59°F·ft ² ·h/BTU·in
ASTM F925-02	Resistance to Chemicals	0 = No Change	
ASTM F1515	Resistance to Light	ΔE ≤ 8	Test result after 300 hours exposure
CPSC-CH-C1001-09.3 (California Proposition 65)	Phthalates	Does not contain phthalate esters	
ASTM E492-09 / ASTM E989-06	Impact Insulation Class	Contact TORLYS for details	
ASTM E90-04 / ASTM E413-10	Sound Transmission Coefficient	Contact TORLYS for details	

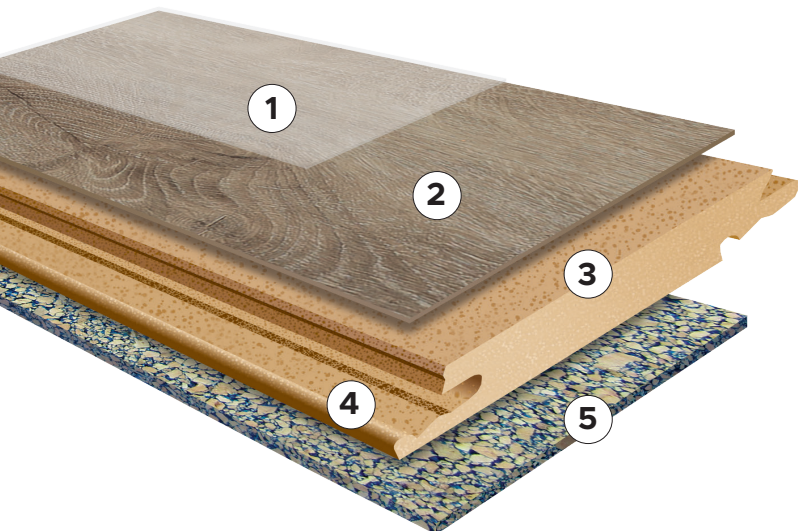

How It's Made

- 1) Top Layer**
Ultra-thick 0.5mm (20 mil) wear layer for ultimate wear resistance
- 2) Decorative Layer**
Beautiful, authentic look and fade resistant
- 3) TORLYS Enhanced Smart Core**
More than twice as thick as the industry standard
- 4) TORLYS Uniclic® Joint**
Gap-free installations and easy repairs with TORLYS Bulldog™ Easy Plank Replacer
- 5) TORLYS CorkPlus™ Blue Underlay**
Quiet, comfortable, built-in underlay with Microban® antimicrobial product protection