


Product Specifications

Style Number	VV458	
Construction	Waterproof Foamed Core	
Edge Profile	Accent Bevel	
Nominal Dimensions	7" wide, 72" long	
	US Units	Metric Units
Actual Product Width	7.13"	18 cm
Actual Product Length	72.05"	183 cm
Wear Layer Thickness	30 mil (0.03")	0.76 mm
Overall Product Thickness	0.472"	12 mm
Core Thickness	0.354"	9 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.118"	3 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	





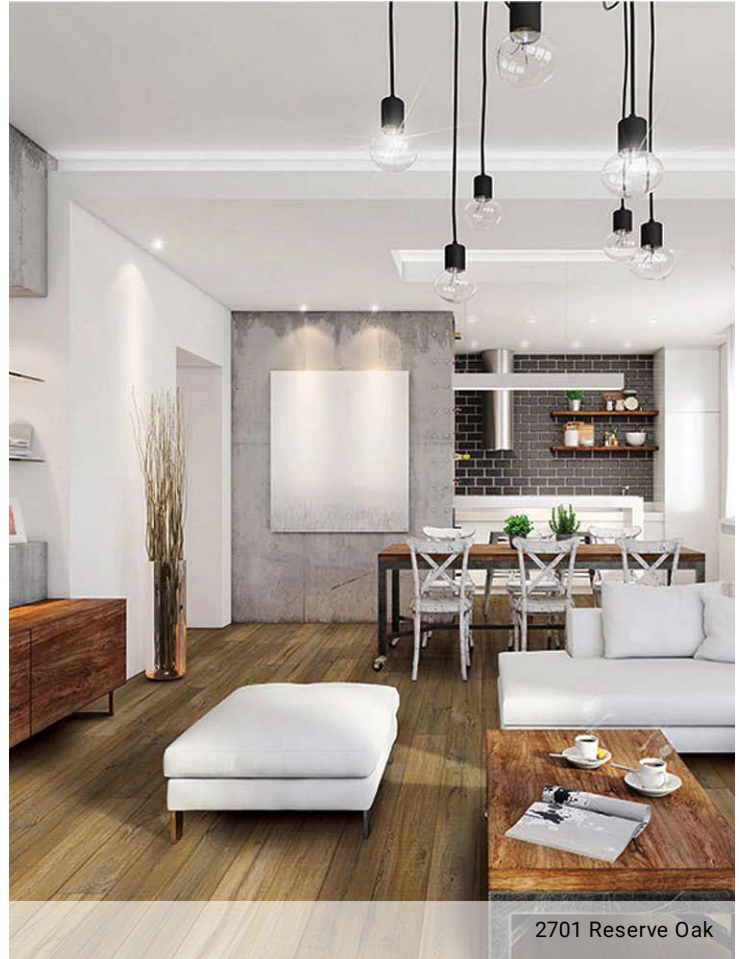



Packaging

Area per Box	21.39 sq ft	1.98 sq m
Pieces per Box	6 pcs	
Weight per Box	53.77 lbs	24.38 kg
Boxes per Pallet	35 boxes	



2701 Reserve Oak

Colors

				
2701 Reserve Oak	2702 Noble Oak	2703 Keystone Pine	2704 Valor Oak	2705 Bravado Pine
Color Variation: V3 - Moderate	Color Variation: V2 - Slight	Color Variation: V2 - Slight	Color Variation: V3 - Moderate	Color Variation: V2 - Slight
				
2706 Spirit Oak	2708 Hempstead Walnut	2710 Ralston Walnut	2711 Penmore Walnut	
Color Variation: V3 - Moderate	Color Variation: V3 - Moderate	Color Variation: V2 - Slight	Color Variation: V2 - Slight	

COREtec Originals Premium VV458

Performance

Residual Indentation (ASTM F1914)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.







Warranties

- USF Lifetime
- Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof
- USF 10 Year Medium Commercial

Certifications


GreenGuard (Certification, Gold, Private Label) Certified

Coordinating Trim

					
Baby Threshold*	T-Molding*	Quarter Round	Overlap Stairnose*	Flush Stairnose	Overlap Reducer
06V26 94"	06V31 94"	06V27 94"	06V29 94"	06V30 94"	06V28 94"

*Packaged with molding track

Stair Tread


Stair Tread
03Z70 48"

