

**Product Specifications**

<b>Style Number</b>	VV488	
<b>Construction</b>	Solid Polymer Core	
<b>Edge Profile</b>	Enhanced Painted Bevel	
<b>Nominal Dimensions</b>	9" wide, 72" long	
	<b>US Units</b>	<b>Metric Units</b>
	-----	
<b>Actual Product Width</b>	9.06"	23 cm
<b>Actual Product Length</b>	72.83"	185 cm
<b>Wear Layer Thickness</b>	20 mil (0.02")	0.5 mm
<b>Overall Product Thickness</b>	0.204"	5.2 mm
<b>Core Thickness</b>	0.157"	4 mm
<b>Attached Underlayment</b>	Attached Cork	
<b>Attached Underlayment Thickness</b>	0.047"	1.2 mm
<b>Finish</b>	UV Acrylic	
<b>Installation Methods</b>	Floating or Direct Glue	
<b>Profile</b>	Angle/Tap	
<b>Country of Origin</b>	Imported	


**Packaging**

<b>Area per Box</b>	36.64 sq ft	3.4 sq m
<b>Pieces per Box</b>	8 pcs	
<b>Weight per Box</b>	63.27 lbs	28.69 kg
<b>Boxes per Pallet</b>	48 boxes	



2095 Bastion Elm

**Colors**

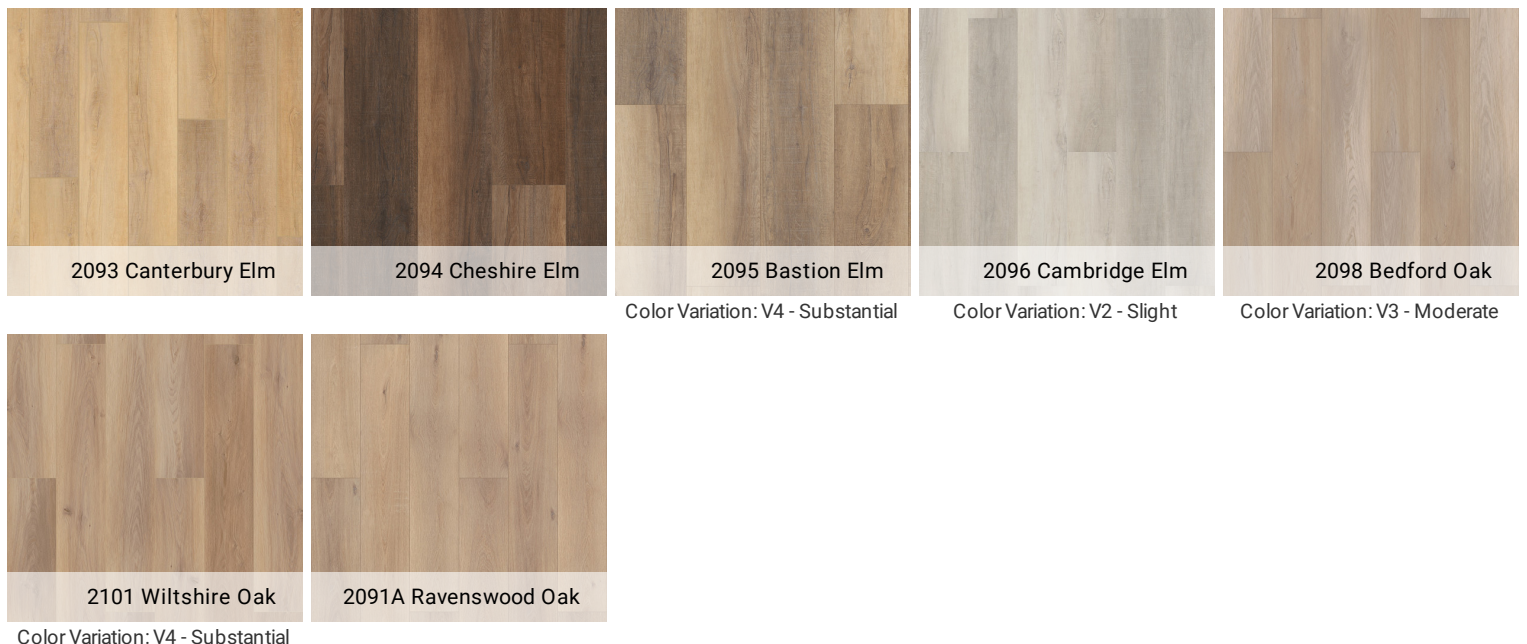

# COREtec PRO Enhanced VV488

The list of colors below complements the entire range of colors available for the current product.

2097 Berkshire Elm

2099 Southampton Oak

2100 Kent Oak

## Warranties

USF Lifetime


USF 15 Year Heavy Commercial

## Coordinating Trim




**Baby Threshold\***

01V20 | 94"




**T-Molding\***

02V62 | 94"




**Quarter Round**

01V46 | 94"



**Overlap Stairnose\***

01V95 | 94"



**Flush Stairnose**

02V17 | 94"

\*Packaged with molding track

## Stair Tread



**Stair Tread**

03Z70 | 48"