

SolidClassic™




TRADITIONAL 19 MM (3/4 IN) THICK SOLID WOOD FLOOR

FEATURES & BENEFITS

- 100% hardwood
- Random plank lengths for a more natural look
- Most varied selection
- Proven manufacturing processes
- Timeless product
- Long service life
- Excellent performance for narrower slats
- 100% made in Canada

INSTALLATION AREAS

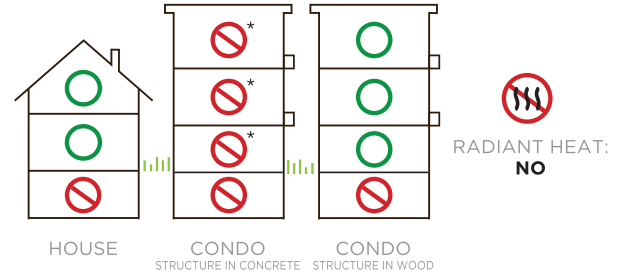

Installation on the ground floor and upstairs only. Do not install in the basement or below grade.

* Never glue directly on concrete; a wood subfloor is required (see NWFA installation guide)

AVAILABLE SPECIES



SUGGESTED UNDERLAYMENTS

Acoustitech (for floating installation), PreVap (stapled) or an equivalent accepted by the NWFA*.


INSTALLATION METHODS



NAILED

SolidClassic™

SPECIFICATIONS

THICKNESS:  19 mm (3/4 in)

WIDTH: 57 mm (2 1/4 in) 108 mm (4 1/4 in),
83 mm (3 1/4 in) 127 mm (5 in)

LENGTH: Random lengths from 25.4 cm (10 in) to 2.13 m (84 in)

Availability to be validated accord to products.

AVAILABLE ACCESSORIES

- Maintenance Kit
- Touch up pens
- Stair Nosing
- Reducer
- Threshold
- "T" Molding
- Quarter round
- Underlayments

DESCRIPTION <small>For more details, please refer to your Preverco dealer.</small>	SOLIDCLASSIC			
	2 1/4" (57 mm)	3 1/4" (83 mm)	4 1/4" (108 mm)	5" (127 mm)
Quantity per box (sq.ft.)	20	20	19	22
Quantity per pallet (sq.ft.)	960	960	912	1 056
Quantity of boxes per pallet	48	48	48	48
Thickness	3/4" (19 mm) solid Important information for SolidClassic platform: for widths 4 1/4" (108 mm) AND 5" (127 mm): Width variation equal or less than 0.015" (0.38 mm) fall within manufacturing tolerance expectations. Example : for 4 1/4" (108 mm), 4.235" to 4.265" (107,62 to 108,38 mm) is accepted. Also, please note that wide boards are more likely to show cupping and shrinking problems.			
Herringbone specifications	n/a	n/a	15' sq. ft./box Fixed length of 21.25" 48 boxes / pallet	n/a

RECOMMENDATIONS

Hardwood flooring should only be installed into environments where "normal living" conditions are possible (between 37% and 50% RH). Please consult our warranty and installation guide for further details.

APPLICABLE STANDARDS

SURFACE BURNING (ASTM-E-84):

- FSI (Flame-Spread index) 95 to 155 Class C (depending on species)
- SD (Smoke Development) 95 to 400 (depending on species)

SURFACE BURNING (ULC-S-102-2):

- FSV (Flame-Spread value) 65 to 155 (depending on species)
- SDC (Smoke Development Classification) 270 to 485 (depending on species)

CRITICAL RADIANT FLUX (ASTM-E-648-94A):

0,42 to 0,65 W/cm2 (depending on species)

FORMALDEHYDE EMISSION (ASTM-E-1333-02):

< 0,01 ppm

FORMALDEHYDE EMISSION (BS EN 120:1992):

1,5 mg/100 g (Class E1) (depending on species)

VOC TOTAL (ASTM-D-6670-01):

< 0.011 ppm (depending on species)

ACOUSTICAL (FIELD IMPACT INSULATION CLASS):

FIIC 66 (Flex 19 only depending on sub-adjacent composition (ceiling/ floor))



FINISHES SATIN + MAT

35-year warranty for residential application (see full warranty leaflet)

COMMERCIAL USE

3-year warranty for light commercial applications (see full warranty leaflet)



Lacey Act
compliant

LEED
Rating System
(Help fulfill credits for)



Preverco

CREATING AMBIANCE™

285, De Rotterdam Street, Saint-Augustin-de-Desmaures (Quebec) G3A 2E5, Canada
Telephone: 418 878-8930 | Toll free (Canada & USA): 1 877 667-2725 | Email: info@preverco.com
PREVERCO.COM