


**Product Specifications**

<b>Style Number</b>	VV872
<b>Construction</b>	Waterproof Foamed Core
<b>Edge Profile</b>	Enhanced Painted Bevel
<b>Nominal Dimensions</b>	12" wide, 24" long

	US Units	Metric Units
<b>Actual Product Width</b>	12.01"	31 cm
<b>Actual Product Length</b>	24.02"	61 cm
<b>Wear Layer Thickness</b>	20 mil (0.02")	0.5 mm
<b>Overall Product Thickness</b>	0.314"	8 mm
<b>Core Thickness</b>	0.236"	6 mm
<b>Attached Underlayment Thickness</b>	Attached Cork	
<b>Attached Underlayment Thickness</b>	0.059"	1.5 mm
<b>Installation Methods</b>	Floating or Direct Glue	
<b>Profile</b>	ANGLE TAP	
<b>Country of Origin</b>	Imported	


**Packaging**

<b>Area per Box</b>	32.04 sq ft	2.97 sq m
<b>Pieces per Box</b>	16 pcs	
<b>Weight per Box</b>	62.83 lbs	28.49 kg
<b>Boxes per Pallet</b>	42 boxes	

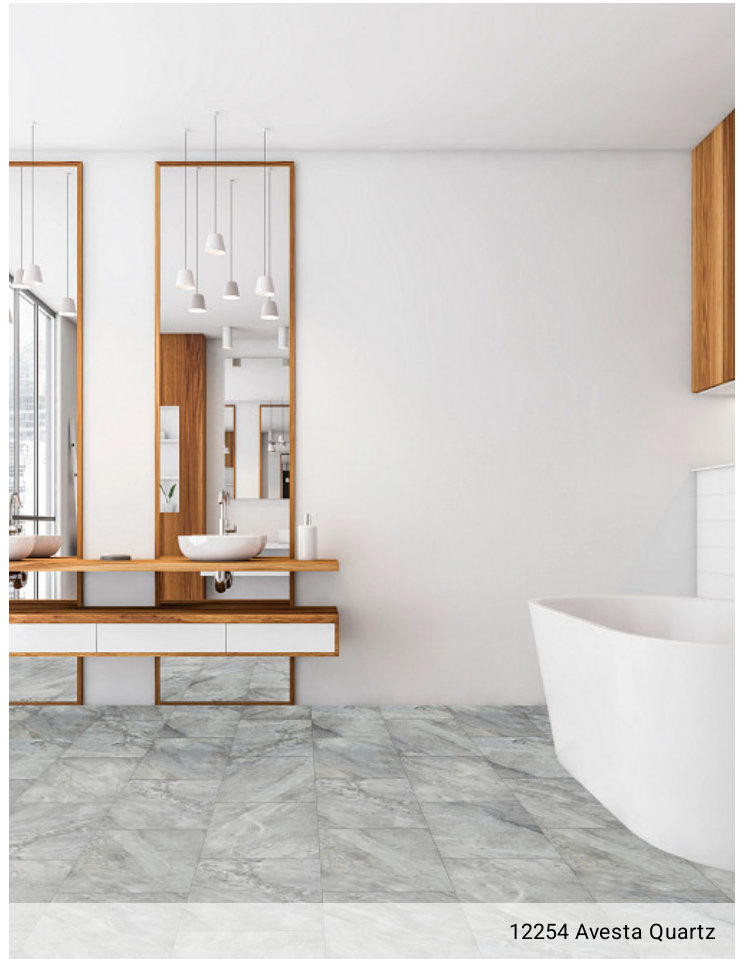

12254 Avesta Quartz

**Colors**

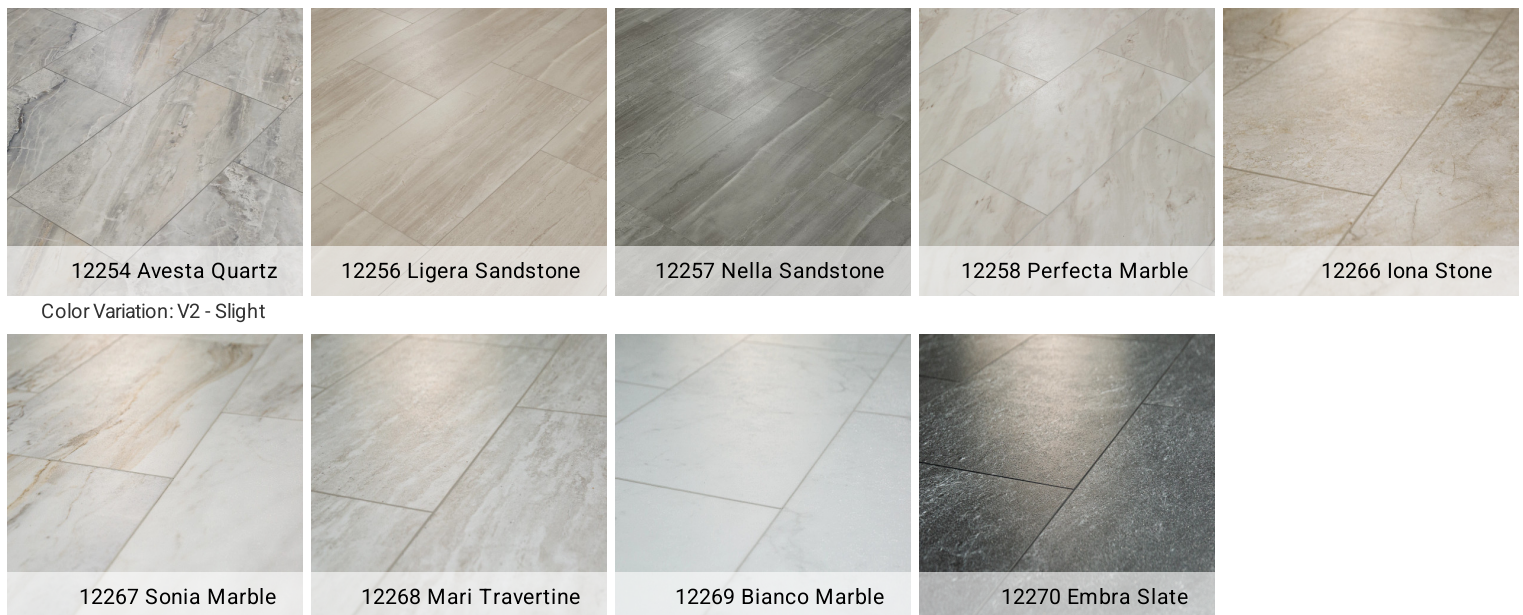

# CT PLUS TILE

## Performance

---

Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

---

USF Lifetime


[Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof](#)

USF 10 Year Medium Commercial

Com Ub Bond 4100/4151


## Coordinating Trim

---

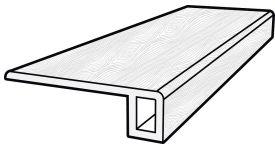


**Baby Threshold\***

BT7CT | 94"




**T-Molding\***

TM7CT | 94"

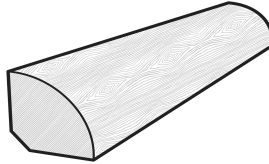

**Quarter Round**

QTRCT | 94"

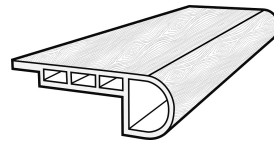

**Flush Stairnose**

FS7HU | 94"

\*Packaged with molding track