

Everest^{XP} Premier

The Pinnacle of Hardwood



TORLYS
smart floors

Smarter Design. Better Performance. More Sustainable

100% natural, eco-engineered hardwood with more design possibilities. Everest^{XP} Premier features cleaner grades and is available in a variety of stained and natural oaks.

Everest^{XP} Premier



**1/2" x 4-7/8" x 47-3/8" (Nominal)
12 mm x 124 mm x 1203 mm**

**12.85 SF per box
63 boxes per pallet**

Smarter Design

- Waterproof surface for installation anywhere in the home
- Premium, cleaner grade hardwood
- Transition-Free up to 50'x50' – float, nail or glue
- Patented Uniclic[®] joint with pretension – keeping any water on the surface of the floor

Better Performance

- TORLYS Maxx Commercial Finish offers extreme stain and wear resistance with an antimicrobial surface
- Extreme durability, will never need to be refinished
- CorkPlus[™] Blue attached underlay with Microban[®] antimicrobial product protection
- Low swell TORLYS[™] Smart Core with extreme dent resistance and dimensional stability
- Can be used with heated floors

More Sustainable

- Plastic Free - 100% real wood
- EcoEngineered with up to 25 more floors made per tree vs. a solid hardwood floor
- TORLYS Bulldog[™] enables single planks of Everest^{XP} to be replaced, quickly and easily. No mess, no dust, no downtime.

For more information visit torlys.com/EverestXP

Alabaster Oak | HCU-EXPP313

Arcadian Oak | HCU-EXPP314

Braeburn Oak | HCU-EXPP315

White Oak Natural | HCU-EXPP312

Red Oak Natural | HCU-EXPP311

Pebble Oak | HCU-EXPP316

Kamee Oak | HCU-EXPP318

Cortland Oak | HCU-EXPP317

Bramble Oak | HCU-EXPP319

No High Shade Variation
Cityscape Oak | HCU-EXPP320



TORLYS
Bulldog[™]
EASY PLANK REPLACER

TORLYS Everest^{XP} Hardwood is a natural product. Colour variation and natural knotting adds to the pleasing visual and applies to all colours, unless otherwise noted.

A Cleaner Floor Starts Here.

Contribute to a cleaner home with built-in antimicrobial protection.



TORLYS Maxx Commercial Finish with built-in antimicrobial technology will keep your floors **99% cleaner** between cleanings, **24/7**.

TORLYS CorkPlus™ Blue with Microban® offers safe and effective protection against the growth of mold and mildew under your floors.

For more information visit torlys.com/CleanerFloors



Finishing Touches

TORLYS Smart-T Plus Molding

Easy and convenient, the TORLYS Smart-T Plus molding solution offers an adaptable and digitally matched profile. Suitable for floating applications.*

TORLYS SmartNosing Molding

A unique stair nosing solution to add the perfect finishing touch. This square edge nosing features the same Uniclic® joint as your floor for an easy and seamless installation.

*See installation instructions for details.

Sustainability

Every TORLYS Smart Floor has two lives. Years down the road when you want to change your floor, TORLYS will offer a 10% credit towards the purchase of a new floor when your existing TORLYS Smart Floor is donated to Habitat for Humanity.

Warranty

Lifetime Residential S.M.A.R.T. Warranty

15-Year Commercial Limited Warranty

*Visit torlys.com/warranty for details.

TORLYS Beautiful Promise

Love the style and colour of your floors or change them – no questions asked. That’s our beautiful promise.*

Easy Maintenance


Everest^{XP} ensures easy ongoing maintenance, including wet mopping your hardwood floors.*

*Visit torlys.com for details.

ASTM and ANSI Product Performance Tests

Standard	Description	Test Result	Notes
ASTM E648	Critical Radiant Flux	Average Critical Radiant Flux: 0.28 W/cm2	(NFPA 101 Classification: Class 2)
ASTM E662	Optical Density of Smoke	Pass ≤450	
ASTM E84	Surface Burning	Flame Spread Index: 60 Smoked-Developed Index: 155	(ASTM E84 Class B)
AATCC 30-III (TM 30-III Aspergillus Niger)**	Antifungal Assessment and Mildew Resistance Test	Pass = Not supportive of fungal growth	
ANSI A137.1-2012 (aka DCOF AcuTest)***	Coefficient of Friction (Floor Slip Resistance)	Average DCOF (wet): 0.60	
ASTM F970	Static Load Limit / Residual Indentation @ 250 PSI Static Load Limit / Residual Indentation @ 1000 PSI	0.000 inch 0.005 inch	
ASTM D2394	Falling Ball Indentation Test @ 72 Inches Drop	0.008 inch = no Fracture of surface or interior material	
ASTM F1914 / ASTM F3261	Short Term Indentation and Residual Indentation	Residual Indentation @ 75 lbs: 0.000 inch No puncture through wear layer / décor into core	
ASTM D1037	Janka Hardness Modified	1,408 lbf	
ASTM C518	Thermal Resistance - Imperial Units Thermal Resistance - SI Units	0.680 °F·ft² h/BTU 0.01198 (m² K)/W	
ASTM F925	Resistance to Chemicals	0 = No Change	
ASTM F1515	Resistance to Light	ΔE ≤ 8	(Test result after 300 hours exposure)
ASTM E492-09 (2016)e1 / ASTM E989 - 18	Impact Insulation Class	Contact TORLYS for details	
ASTM E90-09 (2016) / ASTM E413 - 10	Sound Transmission Coefficient	Contact TORLYS for details	
EN 14534	Resistance to Abrasion	> 6,000 revolutions	

** Note: Relates to testing performed on the TORLYS CorkPlus™ Blue with Microban® agglomerated cork used as backing in the Everest^{XP} products
***Note: Replaces ASTM C1028-07, withdrawn by ASTM in 2014

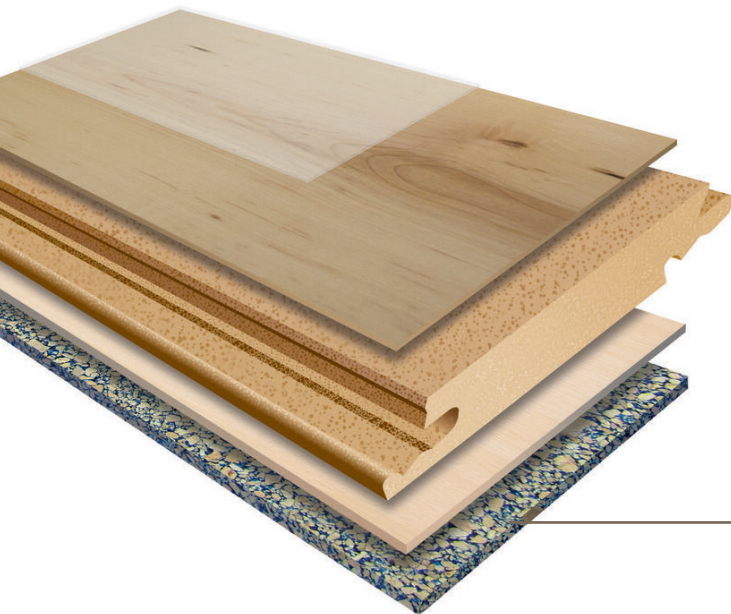

Smarter Design

1. TORLYS Maxx Commercial Finish (Antimicrobial | Anti-Wear)
2. Real Wood Veneer
3. TORLYS™ Enhanced Smart Core with Unifit® X joint*
4. Wood Balance Layer
5. TORLYS CorkPlus™ Blue Underlayment with Microban®

MADE IN BELGIUM

